

Ball Lock Pins • self-locking, with standard handle, titanium
EH 22390.



Product Description

Ball lock pins made from titanium stand out due to the following positive material features:

- Over 40% lighter weight compared to a steel variant
- Absolutely corrosion resistant.

The version made from titanium is used in areas such as lightweight construction, maritime environments and chemical manufacturing.

For quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

Compact design with standard handle.

Material

Pin part

- Titanium

Ball

- Ceramic

Spring

- Corrosion resistant alloy

Operation

The balls are unlocked by pressing the button.

More information

Notes

Special types on request.


Accessories

Can easily be fitted with retaining cable EH 22400.

Further products

- Ball Lock Pins, self-locking, with standard handle
- Retaining Cables

Drawing

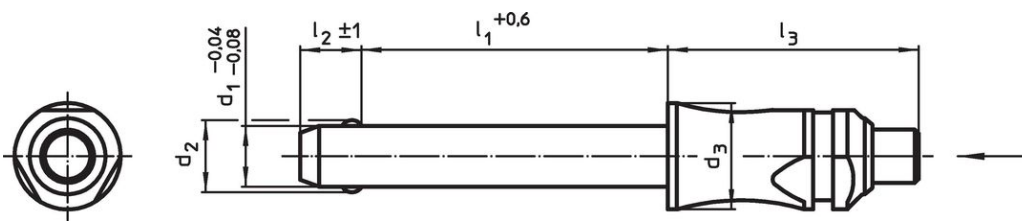


Order information

Dimensions						Location hole H11	Shearing resistance, two-shear ¹⁾ min.	max.		Art. No.
d ₁	l ₁	d ₂	d ₃	l ₂	l ₃					
-0.04 -0.08	+0.6			±1						
[mm]						[mm]	[kN]	[°C]	[g]	
6	10	7.0	10	7.0	26.2	6	23	400	6.6	22390.0022
6	20	7.0	10	7.0	26.2	6	23	400	7.7	22390.0024
6	30	7.0	10	7.0	26.2	6	23	400	8.8	22390.0026
6	40	7.0	10	7.0	26.2	6	23	400	9.9	22390.0028
6	50	7.0	10	7.0	26.2	6	23	400	11.0	22390.0030
8	20	9.5	14	8.2	33.1	8	43	400	18.0	22390.0034
8	30	9.5	14	8.2	33.1	8	43	400	20.0	22390.0036
8	40	9.5	14	8.2	33.1	8	43	400	23.0	22390.0038
8	50	9.5	14	8.2	33.1	8	43	400	25.0	22390.0040
10	20	12.0	14	9.6	33.1	10	43	400	22.0	22390.0044
10	30	12.0	14	9.6	26.2	10	69	400	25.0	22390.0046
10	40	12.0	14	9.6	26.2	10	69	400	29.0	22390.0048
10	50	12.0	14	9.6	26.2	10	69	400	32.0	22390.0050
10	60	12.0	14	9.6	26.2	10	69	400	35.0	22390.0052

¹⁾ Shearing resistance similar to DIN 50141 (determined by tests)

Application example

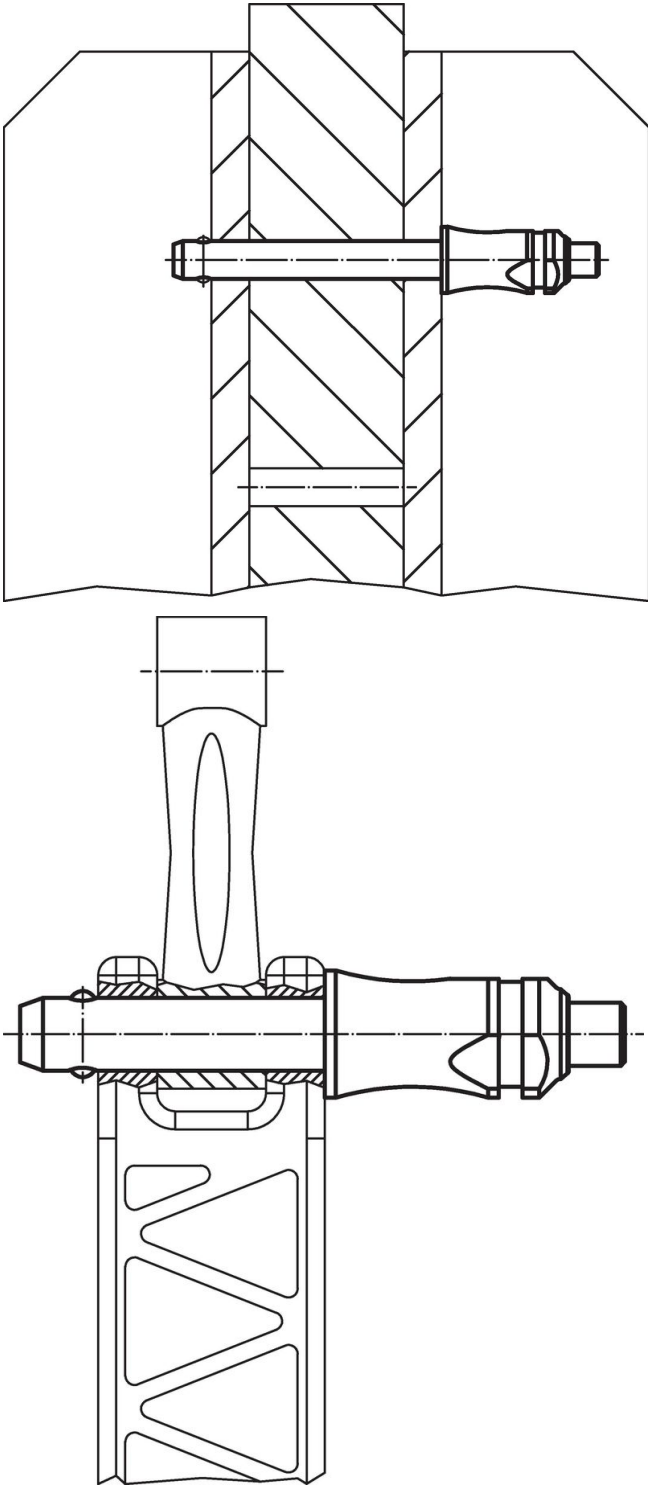

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Does not contain Proposition 65 substances

No Proposition 65 substances included.

<https://www.P65Warnings.ca.gov/>

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.